

## BluBird Rubber Air Hoses

Designed to offer the best of both worlds - the exceptional cold weather flexibility, durability & premium feel of high-end rubber hoses & the light-weight, comfort of premium hybrid hoses.

### Features

- 10 year limited warranty
- 100% rubber construction
- 40% lighter hose than standard rubber air hoses
- Solid Brass fittings superior than aircraft aluminium
- High strength polyester woven braided reinforcement
- 300 PSI working pressure
- 4:1 Safety factor
- Maintains integrity under extreme weather conditions
- Flexibility from -50°F to +190°F
- Ozone resistant
- Abrasion resistant
- Kink Resistant
- 4 finger grip bend restrictor for better use & easier control over the hose.



40% Lightest, Strongest & Most Flexible Rubber Air Hose Technology

300 PSI  
Working Pressure

4:1  
Safety Factor

10 Year  
Warranty


-50° F to 190° F  
Temperature Range

### Features at a glance



#### Lightest | Strongest | Most Flexible

40% Lighter than other Rubber Air Hoses, constructed with abrasion-resistant exterior cover & polyester braided reinforcement from inside. Durability in extreme conditions from -50° to 190 °F.

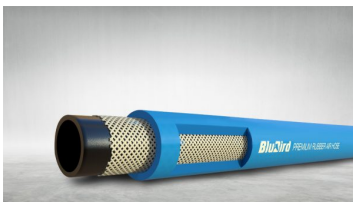

#### Polyester braided reinforcement.

High strength polyester braided reinforcement construction to prevent elongation of hose. Industrial thread and yarn add superior strength with 300 PSI working pressure for 4:1 safety factor.



#### Four finger grip bend restrictor

Blubird rubber Air Hoses comes with four finger grip bend restrictors which increase the working efficiency of user. It reduce bending stress near the hose-coupling junction & prevents it from kinks.



#### Temperature flexibility

Utmost hot & cold environments are a challenge for all rubber hoses but Blubird rubber air hose have flexibility to handle hot weather temperature upto 190°F and cold weather temperature upto -50°F.

## Variations


### General Purpose Air Hose

| Part No. | Inner Diameter (Inch) | Length (Feet) | Fittings (Inch)            | Package Dimensions L x W x H (Inch) | Package Weight (Pounds) |
|----------|-----------------------|---------------|----------------------------|-------------------------------------|-------------------------|
| BB1425   | 1/4                   | 25            | 1/4 NPT                    | 7.00 x 7.00 x 3.00                  | 1.930                   |
| BB1450   | 1/4                   | 50            | 1/4 Male NPT               | 9.50 x 9.50 x 3.50                  | 3.690                   |
| BB14100  | 1/4                   | 100           | 1/4 Male NPT               | 13.25 x 13.25 x 3.75                | 7.400                   |
| BB3825   | 3/8                   | 25            | 1/4 Male NPT               | 10.00 x 10.00 x 2.75                | 2.690                   |
| BB3835   | 3/8                   | 35            | 1/4 Male NPT               | 9.50 x 9.50 x 3.50                  | 3.950                   |
| BB3850   | 3/8                   | 50            | 1/4 Male NPT               | 10.25 x 10.25 x 4.50                | 5.280                   |
| BB38100  | 3/8                   | 100           | 1/4 Male NPT               | 12.25 x 12.25 x 5.50                | 10.660                  |
| BB1225   | 1/2                   | 25            | 1/2 NPT w/ 3/8 NPT reducer | 10.75 x 10.75 x 4.00                | 3.700                   |
| BB1250   | 1/2                   | 50            | 1/2 NPT w/ 3/8 NPT reducer | 10.75 x 10.75 x 4.80                | 7.500                   |
| BB12100  | 1/2                   | 100           | 1/2 NPT w/ 3/8 NPT reducer | 13.00 x 13.00 x 6.75                | 13.790                  |
| BB3450   | 3/4                   | 50            | 3/4 Male NPT               | 17.00 x 17.00 x 6.00                | 15.620                  |

### Extension Air Hose

| Part No. | Inner Diameter (Inch) | Length (Feet) | Fittings (Inch) | Package Dimensions L x W x H (Inch) | Package Weight (Pounds) |
|----------|-----------------------|---------------|-----------------|-------------------------------------|-------------------------|
| BB3815   | 3/8                   | 15            | 1/4 Male NPT    | 9.00 x 9.00 x 3.00                  | 1.650                   |
| BB1210   | 1/2                   | 10            | 1/2 Male NPT    | 10.00 x 10.00 x 3.00                | 1.780                   |
| BB1215   | 1/2                   | 15            | 1/2 Male NPT    | 10.50 x 10.50 x 3.50                | 2.260                   |

## Product Images

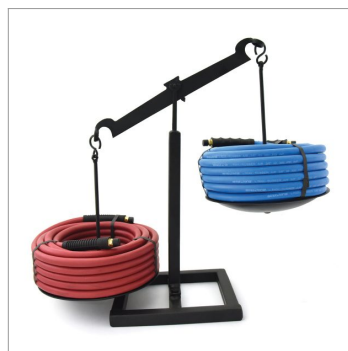

Videos




**Blubird Technology**

November 10, 2014  
7:29




**Blubird Air Hose**

May 17, 2021  
1:58



**Blubird Fastfix**

September 19, 2017  
3:18



**Blubird Fleet Edition**

September 20, 2017  
3:07



Related Products



**Blubird Air Hose Reels (Single Arm)**

Blubird air hose reel is an ultimate combination of powder coated steel constructed retractable hose reel with 12 pt. ratchet locking mechanism and the lightest, strongest and most flexible blubird air hose . This combo is perfect for Automotive & DIY Industry. It is a great cost-effective alternative to motor driven reels.




**Hose Reel Cart**

Heavy-duty Garden Hose Reel Cart holds 400 feet of 5/8in. garden hose (not included). Features strong tubular steel frame and foam-padded handle. Rolls easily on 10in. pneumatic tires with solid steel axles. Built-in basket for accessories.



**HF1 Blow Gun with Hush Tech Nozzle**

Blubird Blow Guns feature an ergonomically superior gun body for maximum comfort and control which reduces operator fatigue. A variable flow trigger regulates air volume precisely with maximum flow, equal to or greater than the competition. The exclusive modular accessories system allows the Blubird blow guns to be customized for extension length and tips needed for any job.





### Industrial "M" Style Couplers & Plugs

1/4" MNPT M style couplers are easy to use; simply push plug into coupler to engage, pull sleeve back to remove. Features a steel drag guard to prevent accidental uncoupling. M style couplers have a 1/4" basic flow size and air flow of 35 SCFM. Maximum inlet pressure of 300 PSI. 1/4" M style MNPT plugs are the industry standard style plugs. These steel plugs have a 1/4" basic flow size, maximum air flow of 40 SCFM and a maximum inlet pressure of 300 PSI.



This PDF was downloaded from the following URL  
<https://www.rmwind.com/hose/blubird-rubber-air-hoses/?&region=north-america>  
on Tuesday, 12 November 2024

Scan QR Code on the right to access this URL in the browser.

